iomega

zip™ drive 100 SCSI

Installation Guide

for Macintosh

Installation Guide

This guide shows how to install the SCSI model of the Zip drive on a Macintosh. If you encounter any problems while installing your Zip drive, refer to the "Troubleshooting" section in the Zip User's Guide.

SCSI (Small Computer System Interface) Requirement

All Macintosh computers have a built-in SCSI connector marked by the SCSI symbol ⇆.

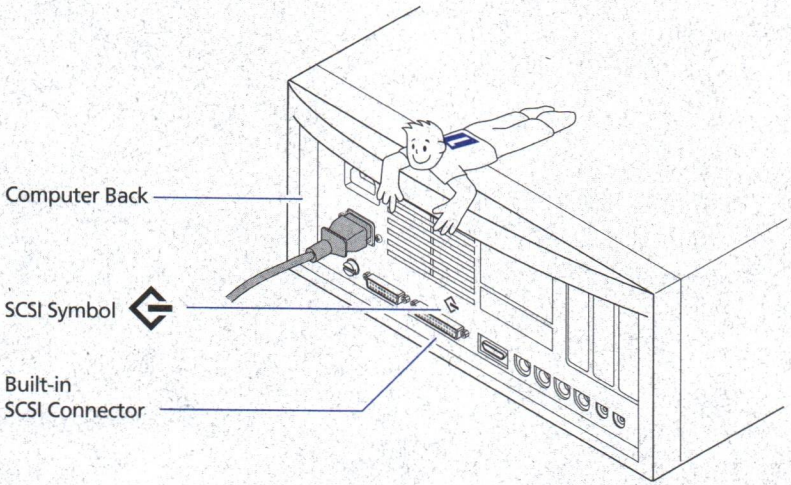

PowerBook Users *Many PowerBook users already have a special PowerBook cable that provides a standard Mac SCSI connector. If you do not have one, you will need an HDI–SCSI adapter for the data cable before you can connect the Zip drive to a PowerBook. Check with your computer dealer, or call Iomega at 1-800-MY-STUFF to order a PowerBook adapter.*

1 Unpack your Zip drive and accessories.

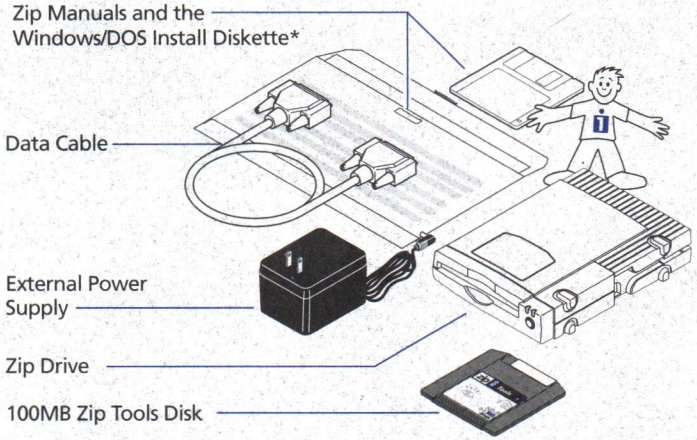

* You will not need an install diskette to install Zip Tools on your Macintosh.

2 Shut down your Mac and pick up the Zip data cable.

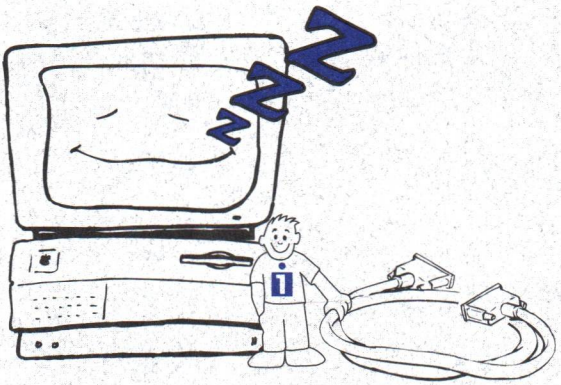

WARNING *Always turn off power to the computer and all devices connected to it before beginning any computer hardware change.* ■

3 Connect the end of the cable marked "zip" to the Zip connector on the back of your drive. *(If the connector does not go on easily, try turning it over. Tighten all connector screws.)*

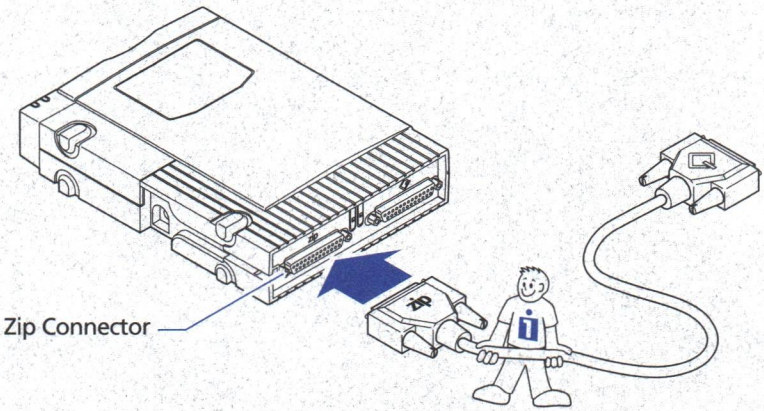

4 Connect the other end of the cable to the SCSI connection on your Mac.

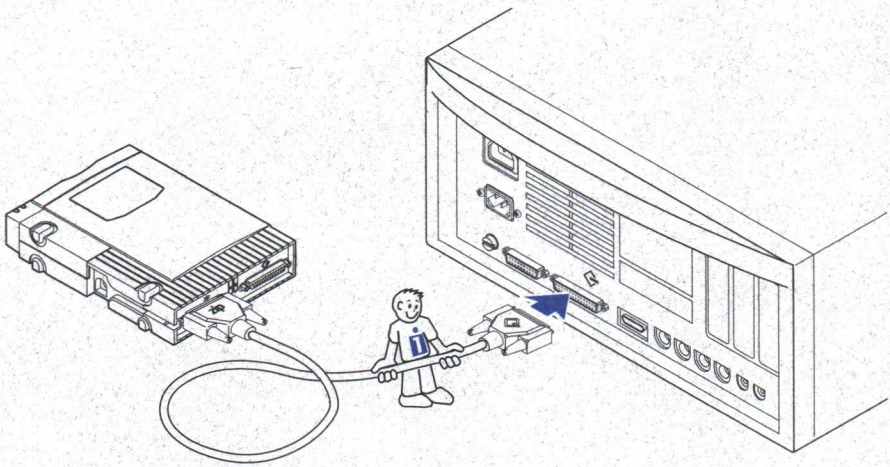

■ ***PowerBook Users*** *You need a special PowerBook cable or adapter to connect the Zip drive. Refer to the section for* ***PowerBook Users*** *at the start of this guide.* ■

5 OPTIONAL: You can connect other SCSI drives to the Zip drive using another SCSI cable *(usually a 25 to 50 pin cable).*

You can also connect the Zip drive to the end of an existing SCSI chain by using a 25 to 50 pin SCSI cable or by using a cable converter with the Zip data cable. When connecting the Zip drive to other SCSI drives, check the SCSI Guidelines in the Zip User's Guide to make sure the SCSI ID and termination on your Zip drive are set correctly.

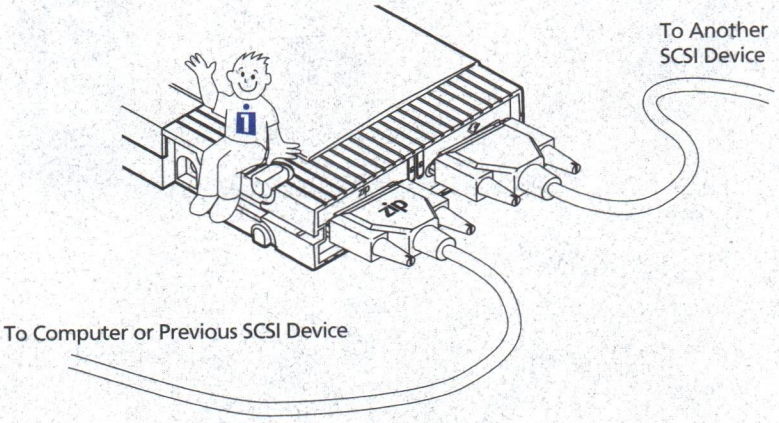

6 Connect the external power supply. *(The power cord fits in the groove on the side of the Zip drive.)*

WARNING *Use only an approved Iomega Zip power supply. Other power supplies may damage your Zip drive.* ■

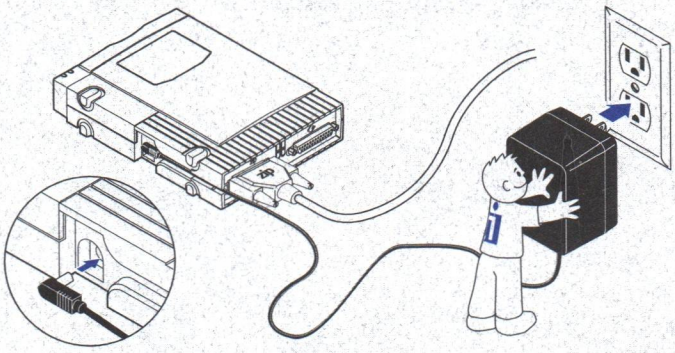

To make it easier to move your Zip drive between home and work, you may want to purchase an extra power supply, cable, and carrying case. Call 1-800-MY-STUFF to order Zip accessories.

7 Check the green power light to make sure the Zip drive power connection is OK.

If the power light does not come on, refer to the "Troubleshooting" section in your Zip User's Guide.

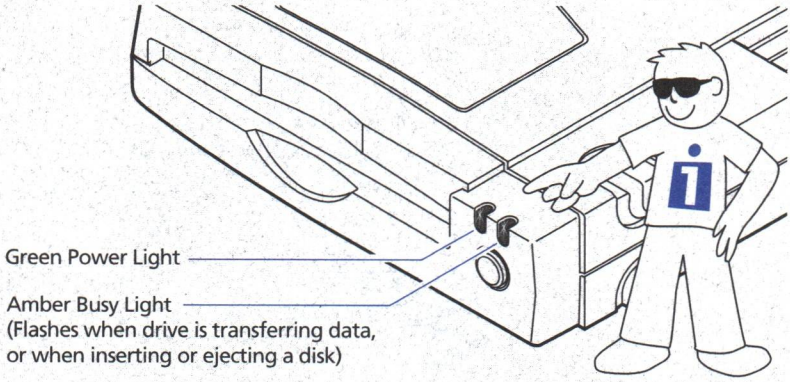

8 Insert the 100MB "tools" disk into the Zip drive.

CAUTION *Never put anything except Zip disks into the Zip drive as this could damage your drive.* ■

Always make sure the green power light is on before inserting (or ejecting) a Zip disk. When you insert a Zip disk, the amber busy light on the Zip drive will flash momentarily.

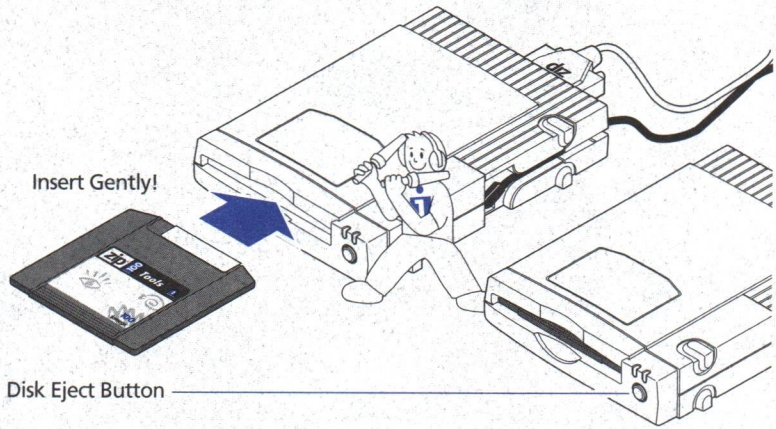

■ ***Ejecting Zip Disks*** *The disk eject button is disabled when the Zip disk icon appears on the Macintosh Desktop. To eject a Zip disk from the Desktop, drag the disk icon to the Trash.* ■

9 Start your Macintosh.

■ ***IMPORTANT*** *Make sure the 100MB Zip "tools" disk is inserted before starting your Macintosh.* ■

10 Double-click the Iomega Tools disk icon located on your desktop.

Iomega Tools

11 Double-click the Iomega Installer icon.

Follow the onscreen instructions to install Iomega Tools software. If you encounter any problems, refer to the *Zip User's Guide* for help.

Iomega Installer

Congratulations! When the software installation is complete, your Zip drive will be ready to use.

Use your Zip drive just like any other drive on your system. Your Zip disk will appear as an icon on your Mac Desktop. You can store and copy files to and from the Zip disk using the same methods you use for your Mac hard disk or floppy disks. For more information on using your Zip drive and Zip tools software, refer to the Zip User's Guide or to the electronic documentation installed in the **Manuals and Help** folder under **Iomega Tools**.

If you want to use your Zip drive on a PC as well as on your Macintosh: *The Guest program on the Install floppy for Windows/DOS will provide temporary access for your Zip drive on a PC with a SCSI connection. For full Zip benefits, call 1-800-MY-STUFF to order an additional Zip "tools" disk.*

United States FCC Information

The computer equipment described in this installation guide generates and uses radio frequency (RF) energy. If the equipment is not installed and operated in strict accordance with the manufacturer's instructions, interference to radio and television reception may result.

■ **Interference** This equipment complies with Part 15 of the FCC Rules and its operation is subject to the following conditions: (1) the equipment may not cause harmful interference, and (2) the equipment must accept any interference received, including interference that may cause undesired operation. ■

Part 15, Class B, of the FCC Rules, is designed to provide reasonable protection against radio and television interference in a residential installation. Although the equipment has been tested and found to comply with allowed RF emission limits, as specified in the above cited Rules, there is no guarantee that interference will not occur in a particular situation. Interference can be determined by turning the equipment off and on while monitoring radio or television reception. The user may be able to eliminate any interference by implementing one or more of the following measures:

- Reorient the affected device and/or its receiving antenna.
- Increase the distance between the affected device and the computer equipment.
- Plug the computer and its peripherals into a different branch circuit from that used by the affected device.

WARNING Only the manufacturer's cable or an equivalent double shielded, host interface cable should be used with external subsystems. Other types of cables may violate FCC rules and regulations. Also, changes or modifications to the electronics or enclosure of this product must be expressly approved by Iomega; otherwise, the user's authority to operate the equipment may be voided by the FCC. ■

Declaration of Conformity

The Zip 100 SCSI drive is CE certified and conforms to the following Directive(s) and Standard(s): Application of Council Directive(s): 89/336/EEC, 73/23/EE. Standard(s) to which Conformity is Declared: EN60950, EN55022, EN50082-1. Manufacturer's Name: Iomega Corporation. Manufacturer's Address: 1821 West Iomega Way, Roy, UT, USA. Importer's Name: Iomega Corporation, GMBH. Type of Equipment: Disk Drive Subsystem. Model No.: Z100S, Z100S2.

Canadian DOC Information

This digital apparatus does not exceed the Class B limits for radio noise emissions from digital devices as set out in the Radio Interference Regulations of the Canadian Department of Communications. Canada ICES-003, Class/Classe B.

UL Approval

In North America, this product is intended to be supplied with a UL-listed and Canadian-certified Class II direct plug-in power unit, with a rated output of 5 Vdc, 1.0 A.

Iomega's Automated Help Systems

Internet Home Page: ..... http://www.iomega.com
America Online™ ..... Keyword: Iomega
Automated FAX Help (U.S. & Canada only) 1-801-778-5763
Automated E-Mail ..... support@iomega.com
(Please type "Zip" in the subject header when sending your E-Mail)
Iomega Bulletin Board 1-801-778-5888
8,N,1; 9600 baud and above; ANSI (24 hrs - Download only)
Repair and Return Information 1-801-779-6100
(No technical support information is available at this number.)

One-on-One Iomega Technical Support

One-on-One Technical Support is free of charge for issues Iomega determines relate to a defect in an Iomega product. Other issues are charged at the rate of $14.99 per incident for Zip products. You can call 1-888-4-IOMEGA, toll-free, to charge the support cost to your credit card (VISA, MasterCard, American Express, or Discover), or you can call 1-900-4-IOMEGA to put the support cost on your phone bill. Either way, the charge will be reversed if your issue is found by Iomega to be due to a product defect.

Iomega's technical support associates are ready to take your call Monday through Friday from 6 a.m. to 6 p.m. Mountain time (U.S. & Canada only).

European Support Numbers

Refer to the electronic manual included with your Zip software package for a complete list of European support numbers.

© 1997 Iomega Corporation. Iomega and the Iomega logo are registered trademarks of, and Zip and the graphic swirl, hand, and eye are trademarks of, Iomega Corporation. All other product and brand names are the property of their respective companies.

iomega

EN131008

Printed on recycled paper